

INFORMATION SHEET

2120-TDWAY-CHAWF-150-ZZ-CO-700038
May 2019



CHAMBERS WHARF

36 HOUR CONTINUOUS CONCRETE POUR FOR THE BASE OF THE SHAFT

Towards the end of June, we are planning to complete the construction of the shaft's base slab, which will be a reinforced concrete structure at the bottom of the shaft.

The concrete will need to be poured in one continuous operation until the base slab is complete. This will ensure a consistent quality and keep out groundwater.

We anticipate that the base slab will take 36 hours of pouring concrete to complete.

The pour will be on a Friday and Saturday, which means that it will start on a Friday morning, continue throughout Friday night and finish Saturday evening.

Lorries will deliver concrete to site throughout this 36hr period. They will use the approved route from Jamaica Road along Bevington Street and the east end of Chambers Street.

Pouring the concrete will take place inside the acoustic enclosure, with limited movement of concrete lorries outside. The river facing door of the enclosure will remain open throughout this period.


Please see overleaf for a map highlighting the vehicle route to site and a list of actions we will be taking to reduce any disturbance to our neighbours.

If you think you may be affected by this activity, you can phone the Independent Advisory Service (IAS) on 0800 917 8845. The IAS will be able to give you independent advice on Tideway's mitigation and compensation policies and how they may be able to support you.

GENERAL UPDATE

The shaft is now excavated to 52 metres deep. We will continue until we get to a depth of 64 metres, when we will construct the base slab.

Shaft excavation takes place continuously (24 hours per day, Monday to Friday), with the doors of the enclosure shut at 18:00.

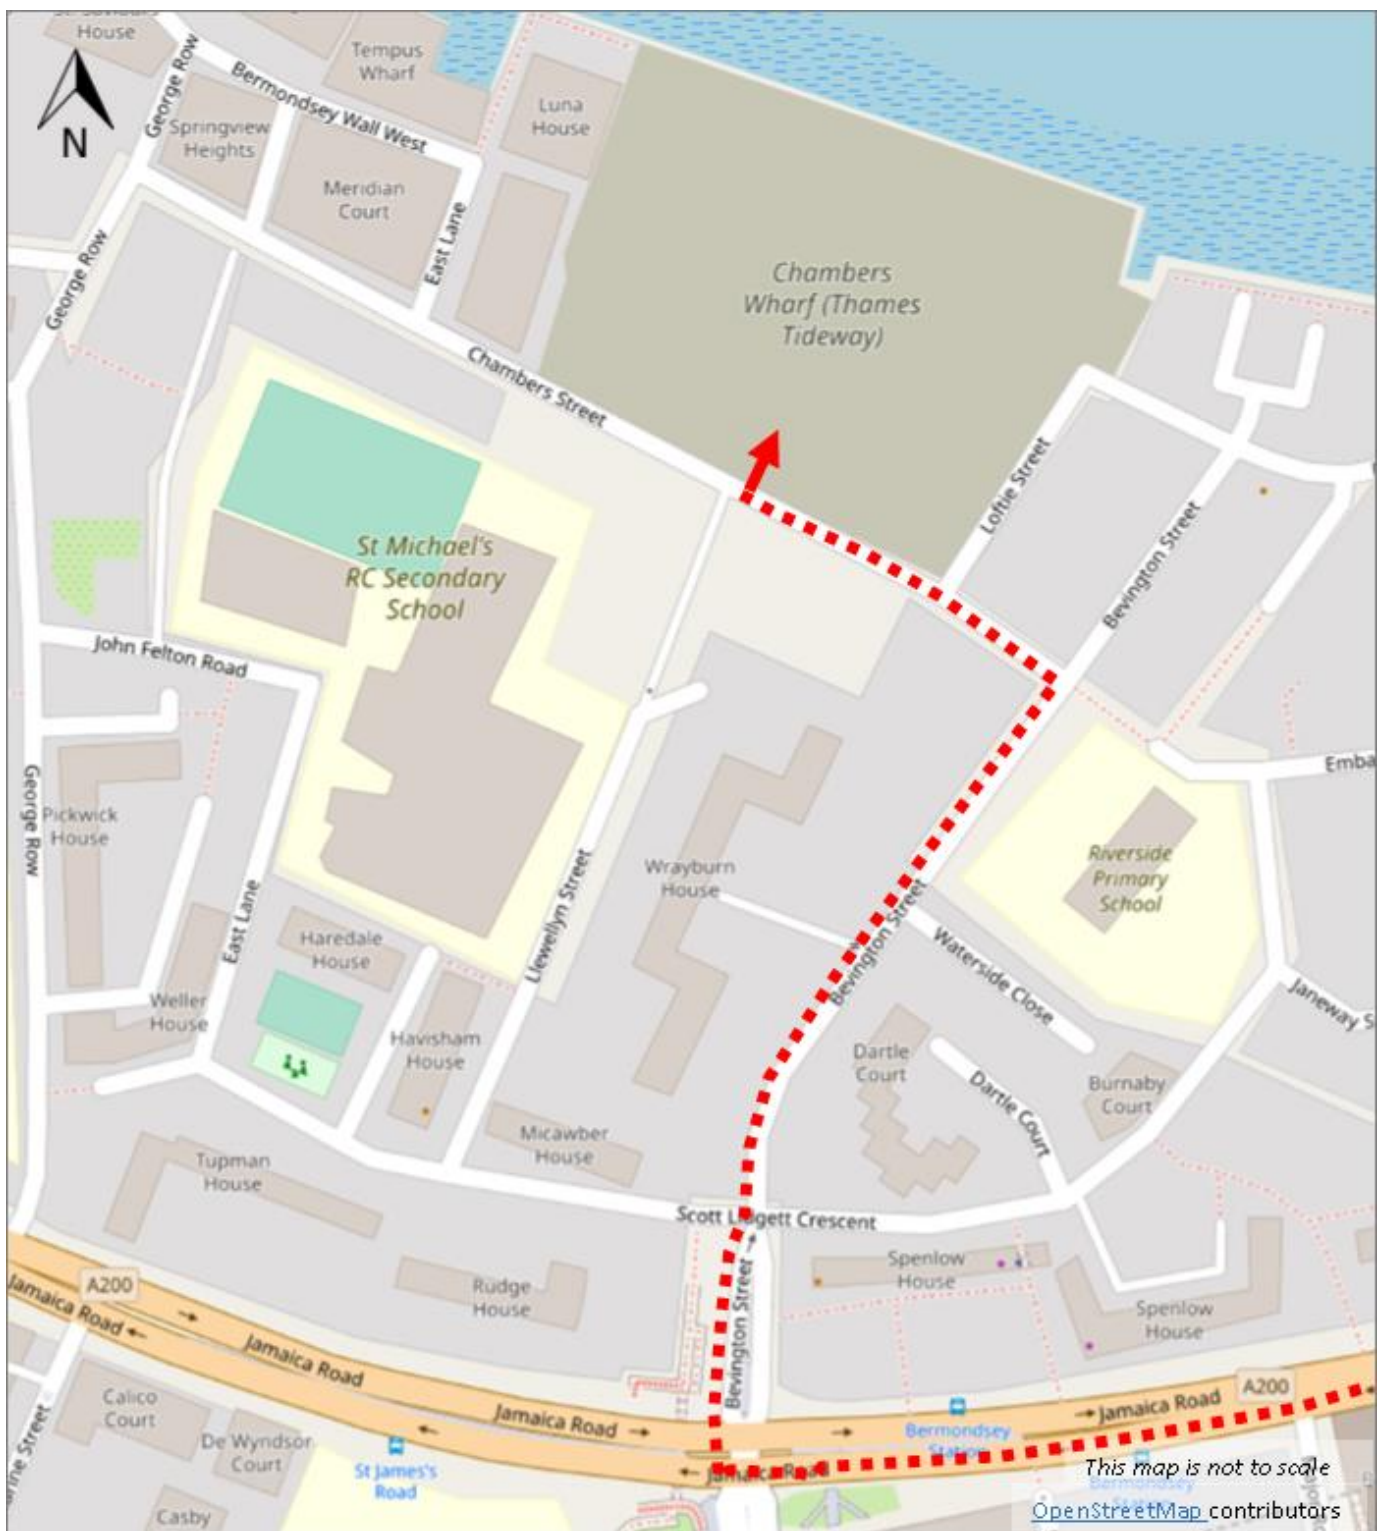

KEY INFO

WORKING HOURS

- Working overnight to pour concrete for the shaft's base slab (approx. 36 hours)
- Continuous working within the acoustic enclosure for excavation of the shaft
- Standard: Monday to Friday: 08:00 – 18:00, Saturday 08:00 - 13:00

WHAT TO EXPECT

- Concrete lorries arriving continuously throughout the night on one occasion
- Concreting taking place within the acoustic enclosure through the night on one occasion

WHAT WE WILL DO

- Place acoustic screens around waiting vehicles
- Eliminate the use of reversing alarms
- Ensure no flashing lights on moving plant
- Keep site lighting to the minimum needed for safe working
- Brief all our workers to keep noise to a minimum and display considerate behaviour
- Test concrete inside the acoustic enclosure
- Keep vehicle speeds low
- Wash concrete vehicles off site, wherever possible